

N-Ch 20V Fast Switching MOSFETs

- ★ Green Device Available
- ★ Super Low Gate Charge
- ★ Excellent Cdv/dt effect decline
- ★ Advanced high cell density Trench technology

Product Summary





| BVDSS | RDSON | ID    |
|-------|-------|-------|
| 20V   | 8mΩ   | 12.0A |

Description

The XR2012S is the high cell density trenched N-ch MOSFETs, which provides excellent RDSON and efficiency for most of the small power switching and load switch applications. The XR2012S meet the RoHS and Green Product requirement with full function reliability approved.

SOP8 Pin Configuration

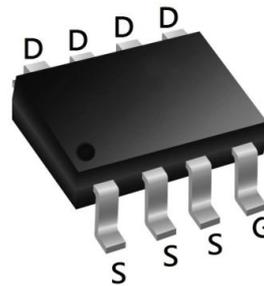

Absolute Maximum Ratings

| Symbol               | Parameter                                   | Rating     | Units      |
|----------------------|---|------------|------------|
| $V_{DS}$             | Drain-Source Voltage                        | 20         | V          |
| $V_{GS}$             | Gate-Source Voltage                         | $\pm 12$   | V          |
| $I_D@T_A=25^\circ C$ | Continuous Drain Current, $V_{GS} @ 4.5V^1$ | 12.0       | A          |
| $I_D@T_A=70^\circ C$ | Continuous Drain Current, $V_{GS} @ 4.5V^1$ | 7.0        | A          |
| $I_{DM}$             | Pulsed Drain Current <sup>2</sup>           | 34         | A          |
| $P_D@T_A=25^\circ C$ | Total Power Dissipation <sup>3</sup>        | 3          | W          |
| $P_D@T_A=70^\circ C$ | Total Power Dissipation <sup>3</sup>        | 0.86       | W          |
| $T_{STG}$            | Storage Temperature Range                   | -55 to 150 | $^\circ C$ |
| $T_J$                | Operating Junction Temperature Range        | -55 to 150 | $^\circ C$ |

Thermal Data

| Symbol          | Parameter  | Max. | Unit         |
|-----------------|--|------|--------------|
| $R_{\theta JA}$ | Thermal Resistance Junction-ambient <sup>1</sup> | 100  | $^\circ C/W$ |

**Electrical Characteristics** ( $T_J=25^\circ\text{C}$  unless otherwise specified)

| Symbol  | Parameter   | Test Condition  | Min. | Typ. | Max.      | Units      |
|---|---|---|------|------|-----------|------------|
| <b>Off Characteristic</b>                                     |   |   |      |      |           |            |
| $V_{(BR)DSS}$   | Drain-Source Breakdown Voltage                            | $V_{GS}=0V, I_D=250\mu A$                                     | 20   | -    | -         | V          |
| $I_{DSS}$   | Zero Gate Voltage Drain Current                           | $V_{DS}=20V, V_{GS}=0V,$                                      | -    | -    | 1.0       | $\mu A$    |
| $I_{GSS}$   | Gate to Body Leakage Current                              | $V_{DS}=0V, V_{GS}=\pm 12V$                                   | -    | -    | $\pm 100$ | nA         |
| <b>On Characteristics</b>                                     |   |   |      |      |           |            |
| $V_{GS(th)}$  | Gate Threshold Voltage                                    | $V_{DS}=V_{GS}, I_D=250\mu A$                                 | 0.5  | 0.75 | 1.2       | V          |
| $R_{DS(on)}$  | Static Drain-Source on-Resistance<br><small>note3</small> | $V_{GS}=4.5V, I_D=15A$  | -    | 8    | 11.2      | m $\Omega$ |
|   |   | $V_{GS}=2.5V, I_D=10A$  | -    | 11.7 | 17.5      |            |
| <b>Dynamic Characteristics</b>                                |   |   |      |      |           |            |
| $C_{iss}$   | Input Capacitance   | $V_{DS}=10V, V_{GS}=0V,$<br>$f=1.0MHz$                        | -    | 1000 | -         | pF         |
| $C_{oss}$   | Output Capacitance  |   | -    | 182  | -         | pF         |
| $C_{rss}$   | Reverse Transfer Capacitance                              |   | -    | 164  | -         | pF         |
| $Q_g$   | Total Gate Charge   | $V_{DS}=10V, I_D=15A,$<br>$V_{GS}=4.5V$                       | -    | 15   | -         | nC         |
| $Q_{gs}$  | Gate-Source Charge  |   | -    | 2    | -         | nC         |
| $Q_{gd}$  | Gate-Drain("Miller") Charge                               |   | -    | 5.2  | -         | nC         |
| <b>Switching Characteristics</b>                              |   |   |      |      |           |            |
| $t_{d(on)}$   | Turn-on Delay Time  | $V_{DS}=10V,$<br>$I_D=15A, R_{GEN}=3\Omega,$<br>$V_{GS}=4.5V$ | -    | 9    | -         | ns         |
| $t_r$   | Turn-on Rise Time   |   | -    | 25   | -         | ns         |
| $t_{d(off)}$  | Turn-off Delay Time                                       |   | -    | 37   | -         | ns         |
| $t_f$   | Turn-off Fall Time  |   | -    | 14   | -         | ns         |
| <b>Drain-Source Diode Characteristics and Maximum Ratings</b> |   |   |      |      |           |            |
| $I_S$   | Maximum Continuous Drain to Source Diode Forward Current  |   | -    | -    | 40        | A          |
| $I_{SM}$  | Maximum Pulsed Drain to Source Diode Forward Current      |   | -    | -    | 120       | A          |
| $V_{SD}$  | Drain to Source Diode Forward Voltage                     | $V_{GS}=0V, I_S=30A$  | -    | -    | 1.2       | V          |

Notes: 1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. EAS condition:  $T_J=25^\circ\text{C}, V_{DD}=10V, V_G=4.5V, L=0.5mH, R_G=25\Omega, I_{AS}=9.6A$

3. Pulse Test: Pulse Width $\leq 300\mu s$ , Duty Cycle $\leq 0.5\%$

Typical Performance Characteristics

Figure 1: Output Characteristics

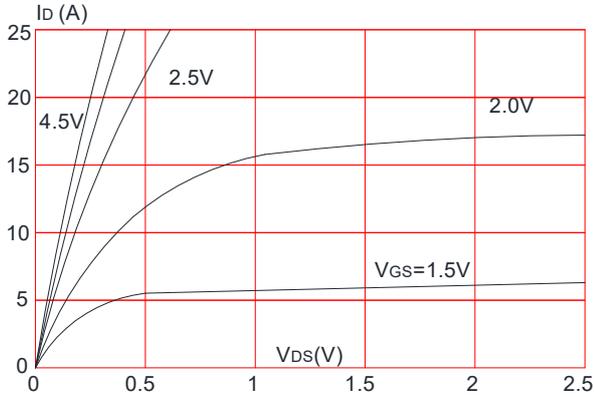


Figure 2: Typical Transfer Characteristics

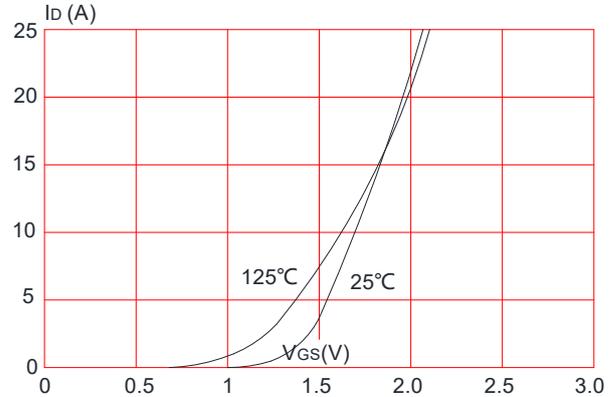


Figure 3: On-resistance vs. Drain Current

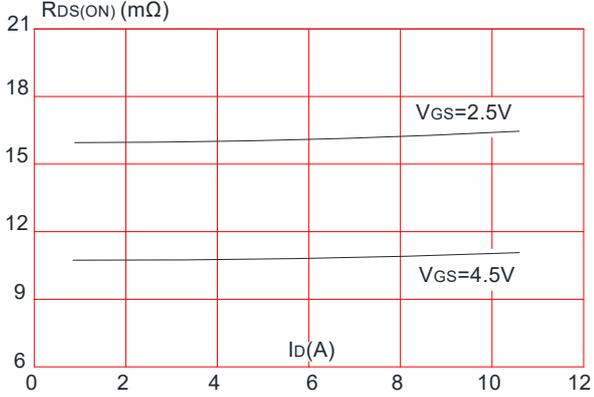


Figure 4: Body Diode Characteristics

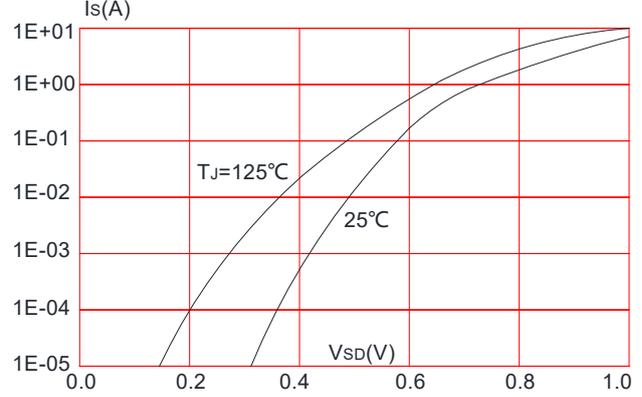


Figure 5: Gate Charge Characteristics



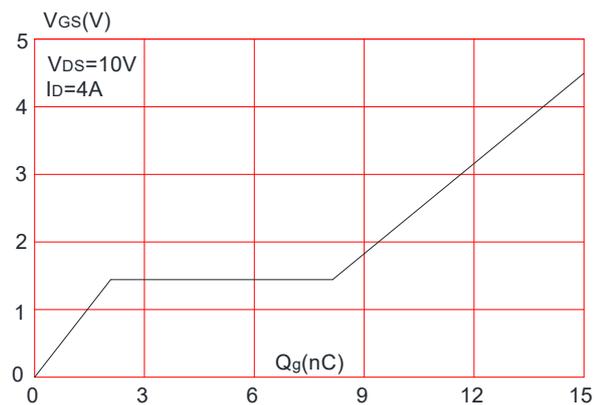


Figure 6: Capacitance Characteristics

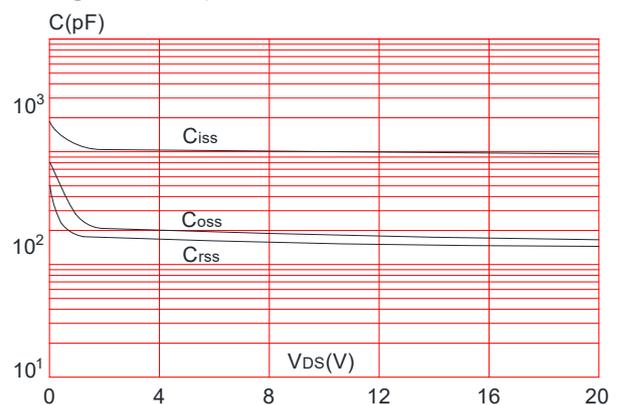


N-Ch 20V Fast Switching MOSFETs


**Figure 7:** Normalized Breakdown Voltage vs. Junction Temperature

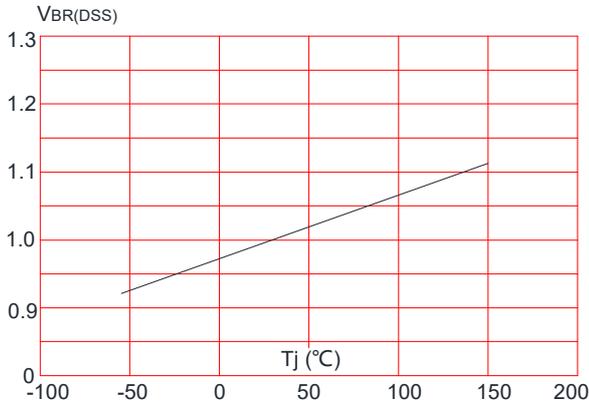


**Figure 8:** Normalized on Resistance vs. Junction Temperature

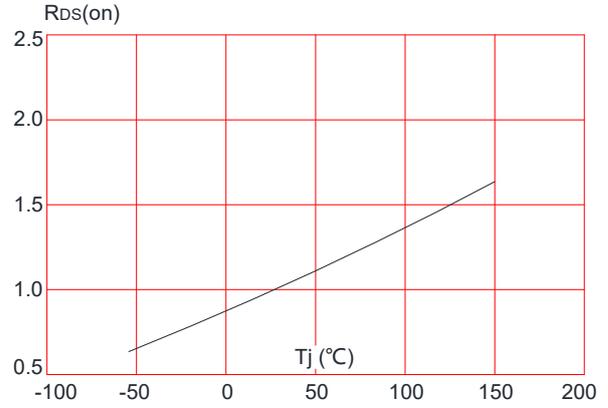


**Figure 9:** Maximum Safe Operating Area

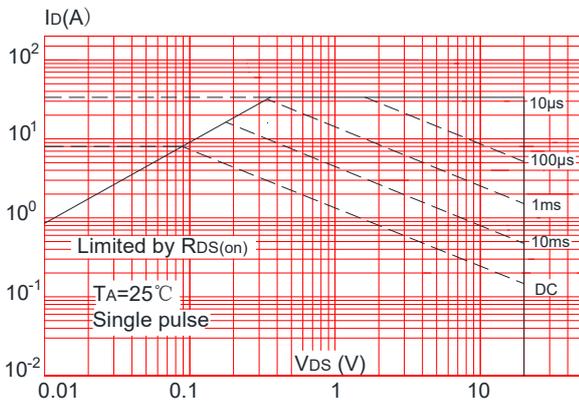


**Figure 10:** Maximum Continuous Drain Current vs. Ambient Temperature

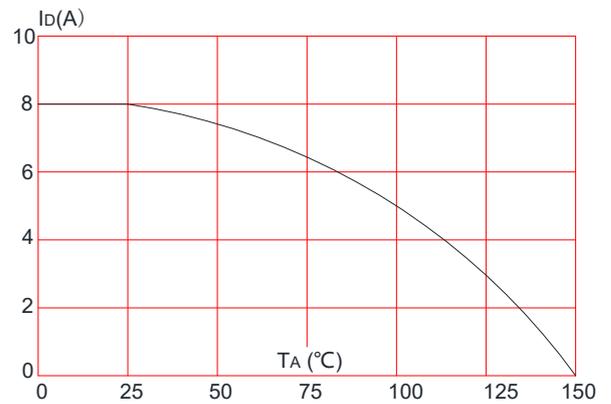

**Figure.11:** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

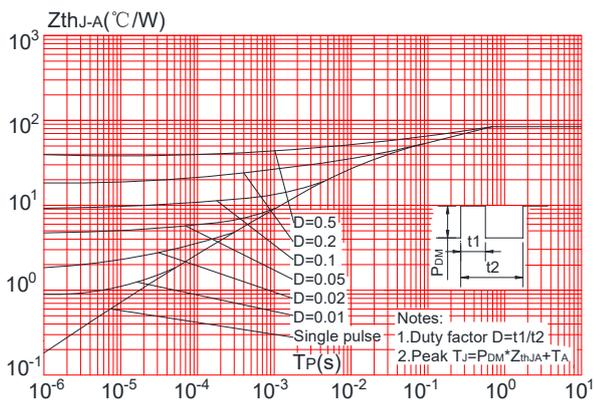

SOP-8 Package Information

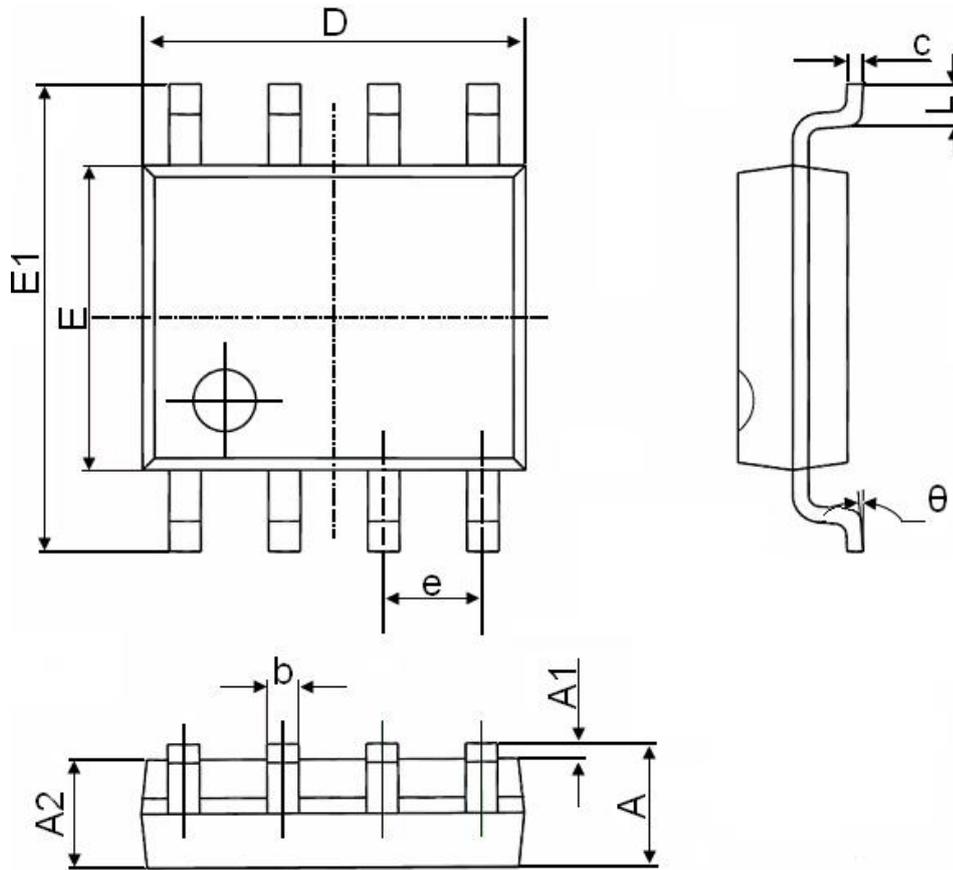

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min.                      | Max.  | Min.                 | Max.  |
| A      | 1.350                     | 1.750 | 0.053                | 0.069 |
| A1     | 0.100                     | 0.250 | 0.004                | 0.010 |
| A2     | 1.350                     | 1.550 | 0.053                | 0.061 |
| b      | 0.330                     | 0.510 | 0.013                | 0.020 |
| c      | 0.170                     | 0.250 | 0.006                | 0.010 |
| D      | 4.700                     | 5.100 | 0.185                | 0.200 |
| E      | 3.800                     | 4.000 | 0.150                | 0.157 |
| E1     | 5.800                     | 6.200 | 0.228                | 0.244 |
| e      | 1.270(BSC)                |       | 0.050(BSC)           |       |
| L      | 0.400                     | 1.270 | 0.016                | 0.050 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |